DRAWING VERSION		SYSTEM UPDATED
A FIRST RELEASE	20181005	

無背膠銅版紙

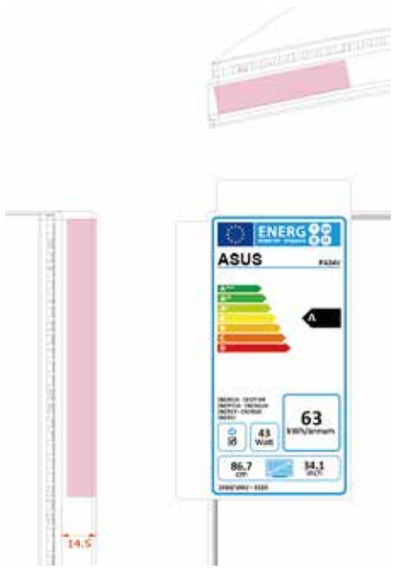

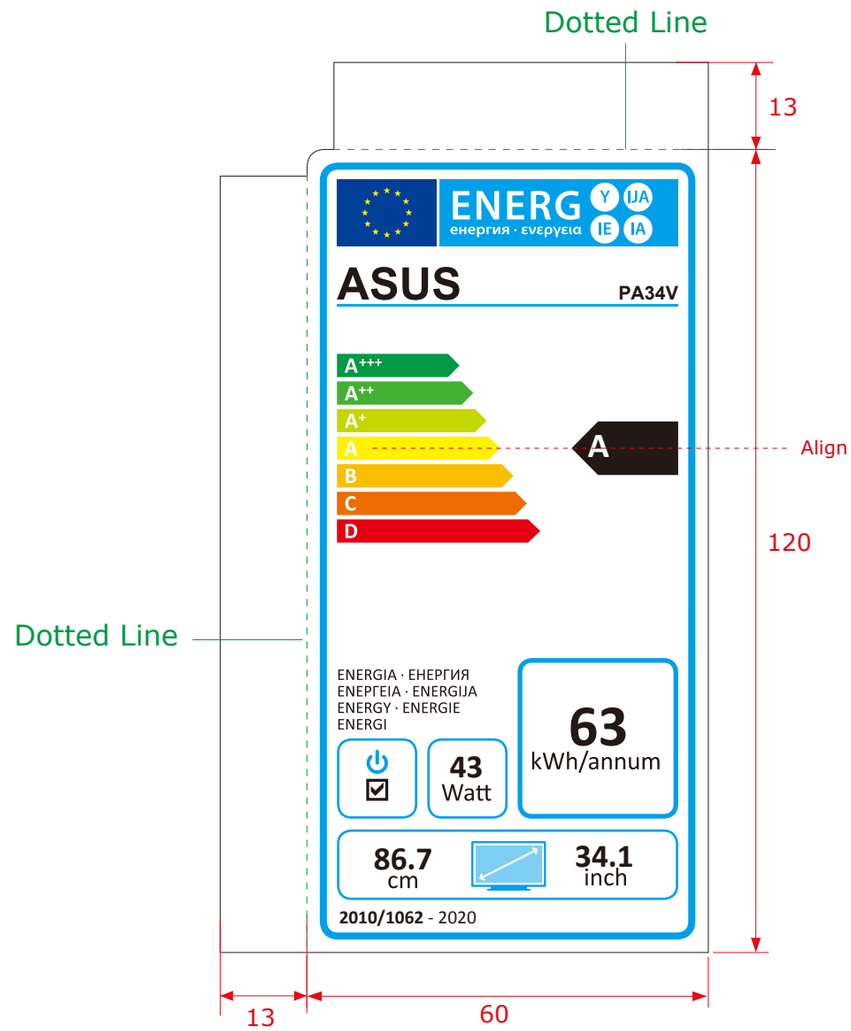

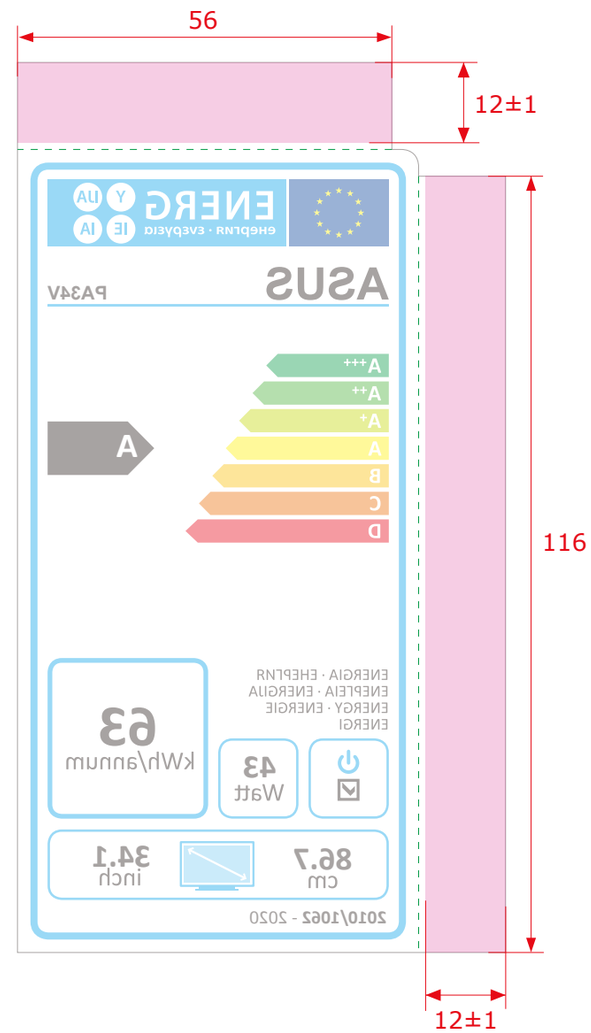

NOTE:

- MATERIAL: ART PAPER 80LB, WHITE+PP FILM (銅版紙正反覆膜)
- FINISH: PRINT FRONT SIDE, ADHESIVE ON AREA OF REAR SIDE
- ADHESIVE: ■ 25μ Silicone/Acrylic PSA Sandwich Double Side Tape
  ☐ 1R REMOVEABLE ADHESIVE(Front side)
- PRINTING COLOR: VENDOR REFER TO CMYK
  FACTORY REFER TO SAMPLE
  ■ C100 M80 Y0 K0
  ■ C100 M0 Y0 K0
- BACKGROUD COLOR: WHITE
- TOLERANCE OF DIMENSION: +0.2 / -0.0
- TEMPERATURE RANGE: -10°~80°
  STICK-ON: ☐ CTN ☐ Accessory ■ Monitor
- Dotted Line spec: 2 5 2 5 2

	Information appear on label	
Model(s):	PA34V	
Energy Efficiency Class:	A	
On mode power consumption:	43.2	Watts
Annual on mode energy consumption:	63.0	kWh/Annum
Visible screen diagonal:	86.7	cm
Visible screen diagonal:	34.1	inches

MODEL	PA34V	MAME	EU ENERGY LBL		
DRN	Agnes.CY.Lin	MATERIAL			
DSN		FINISH			
CKD		SCALE	1 : 1	DIM IN	mm
APPD		SHEET	1 of 1	CAVITIES	

Qisda Corporation

TOLERANCE UNLESS OTHERWISE SPECIFIED (±)							
CLASS	A	B	C	D	E	F	G
< 8mm	0.05	0.1	0.1	0.2	0.2	0.4	0.4
8 ~ 25mm	0.08	0.15	0.15	0.3	0.3	0.6	0.6
25 ~ 80mm	0.12	0.2	0.25	0.4	0.5	0.8	1.0
80 ~ 250mm	0.25	0.3	0.4	0.6	0.8	1.2	1.5
250 ~ 800mm	0.5	0.6	0.8	1.0	1.5	2.0	3.0
> 800mm	1.0	1.0	1.5	1.7	3.0	4.0	6.0
ANGLE	0.5						
FILE NAME							
PART NO.							