
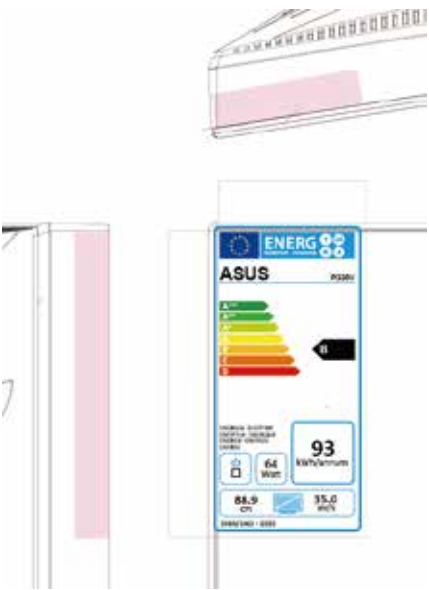


1	2	3	4	5	6
DRAWING VERSION					SYSTEM UPDATED
A FIRST RELEASE					20190308

無背膠銅版紙

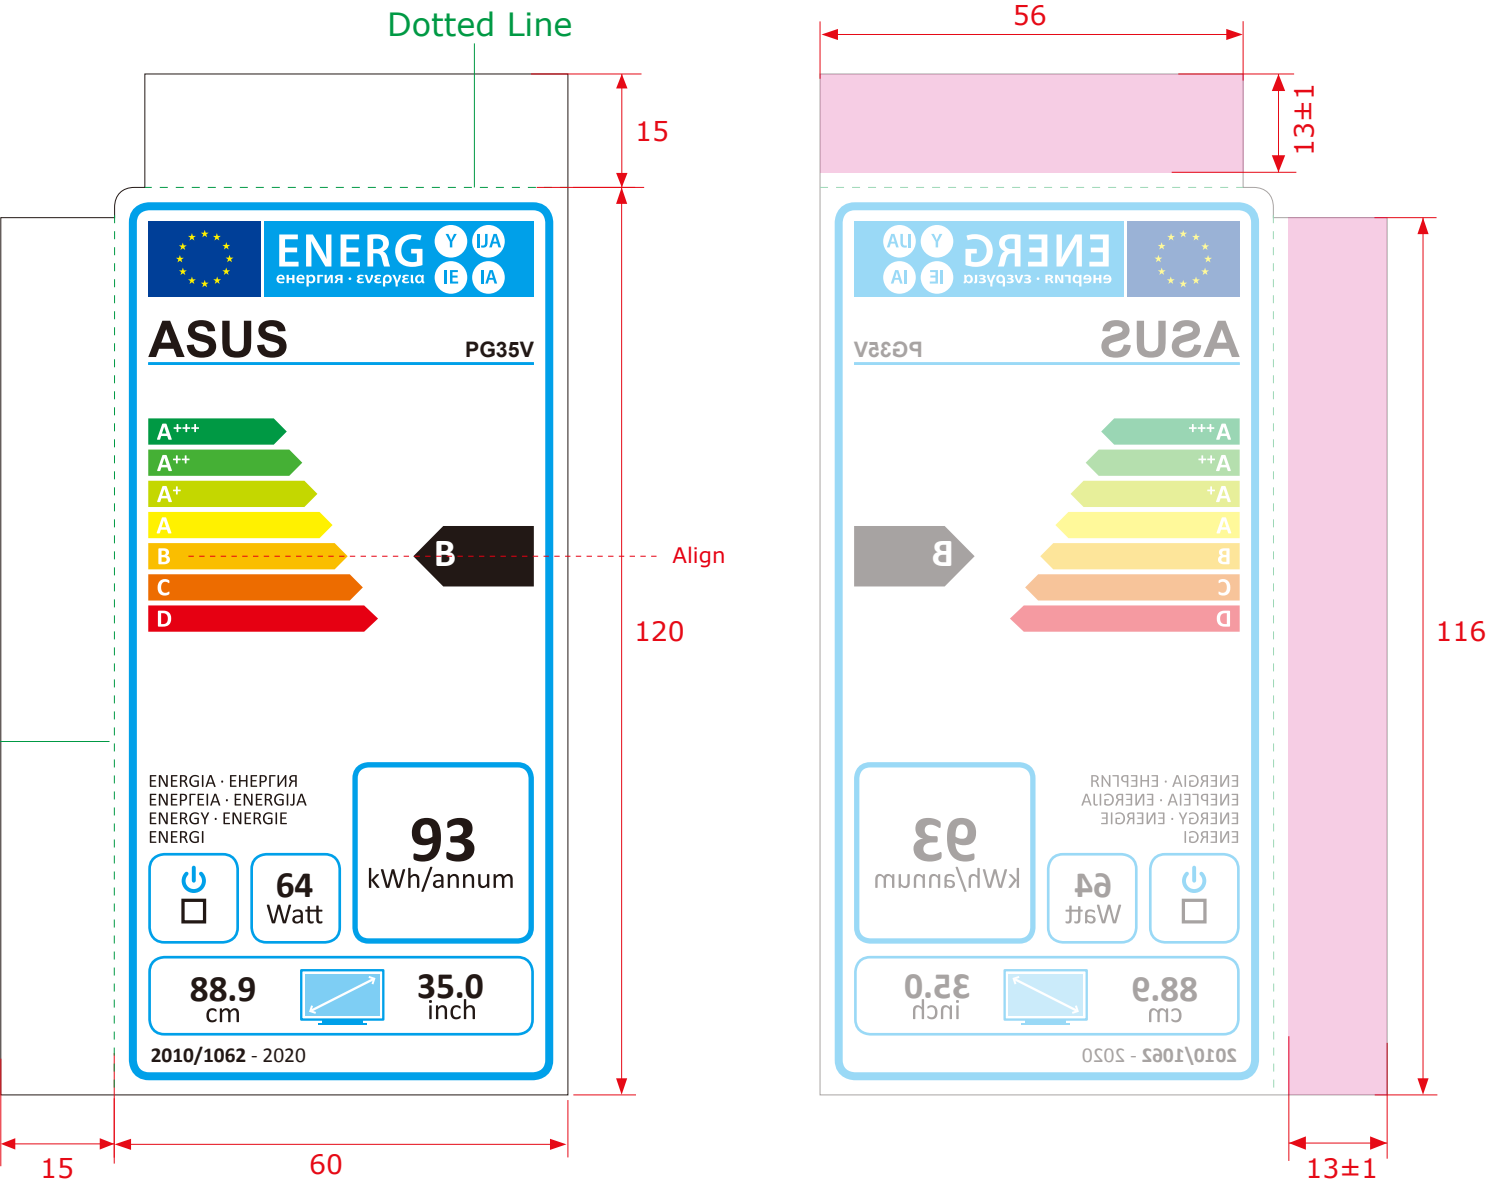

- NOTE:
- MATERIAL: ART PAPER 80LB, WHITE+PP FILM (銅版紙正反覆膜)
 - FINISH: PRINT FRONT SIDE, ADHESIVE ON AREA OF REAR SIDE
 - ADHESIVE: ■ 25μ Silicone/Acrylic PSA Sandwich Double Side Tape
□ 1R REMOVEABLE ADHESIVE(Front side)
 - PRINTING COLOR: VENDOR REFER TO CMYK FACTORY REFER TO SAMPLE
 - BACKGROUND COLOR: WHITE
 - TOLERANCE OF DIMENSION: +0.2 -0.0
 - TEMPERATURE RANGE: -10° ~80°
 - STICK-ON: □ CTN □ Accessory ■ Monitor
 - Dotted Line spec: 2 5 2 5 2

	Information appear on label	
Model(s)	PG35V	
Energy Efficiency Class	B	
On mode power consumption	64	Watts
Annual on mode energy consumption	93	kWh/Annum
Visible screen diagonal	88.9	cm
Visible screen diagonal	35.0	inches
Remark/additional info		
EER	0.397	

MODEL	PG35V	MAME	EU ENERGY LBL		TOLERANCE UNLESS OTHERWISE SPECIFIED (±)							
DRN	Agnes.CY.Lin	MATERIAL			CLASS	A	B	C	D	E	F	G
DSN		FINISH			< 8mm	0.05	0.1	0.1	0.2	0.2	0.4	0.4
CKD		SCALE	1 : 1	DIM IN	mm	8 ~ 25mm	0.08	0.15	0.15	0.3	0.3	0.6
APPD		SHEET	1 of 1	CAVITIES		25 ~ 80mm	0.12	0.2	0.25	0.4	0.5	0.8
Qisda Corporation						80 ~ 250mm	0.25	0.3	0.4	0.6	0.8	1.2
						250 ~ 800mm	0.5	0.6	0.8	1.0	1.5	2.0
						> 800mm	1.0	1.0	1.5	1.7	3.0	4.0
						ANGLE	0.5					
						FILE NAME						
						PART NO.	4E.3U702.131					