

# EcoFlow DELTA 3 Max Plus Smart Extra Battery

Thank you for choosing our product!

## Contents

### About this Manual

#### Overview

Appearance

Button and LED Indicators

#### Product Compatibility

#### Getting Started

Support Your Power Station

Charge Your Extra Battery

#### Storage and Maintenance

Storage

Cleaning

Maintain Battery Health


#### Safety Instructions and Compliances

Disclaimer

Safety Instructions

In Case of Emergency

Recycling and Disposal



FAQ



EcoF  
low  
App



Afte  
r-  
sale  
s  
Polic  
y



Com  
mun  
ity

## About this Manual

- This manual contains an introduction to this product, and details on its operation, management, and maintenance. Please note that this manual may be updated without prior notice.
- The availability of certain accessories and features described in this manual may vary depending on your country or region.

## Appendix

### Technical Specifications

### What's in the Box

Please refer to the actual product received.

- If you are reading this manual in PDF format, please note that you can access it online at [EcoFlow Support](#) for a better experience and the latest updates.

## Overview

EcoFlow DELTA 3 Max Plus Smart Extra Battery (hereinafter referred to as "the extra battery", "the battery", or "the product") is a LiFePO<sub>4</sub> battery with a capacity of 2048Wh. It is designed to expand the battery capacity of your EcoFlow portable power station and provide longer-lasting power support.

## Appearance






- 1 Status LED
- 2 Main Power Button
- 3 Extra Battery Port (XT150)
- 4 Protective Cover

\* The Extra Battery Port on the battery is an EcoFlow proprietary port.

## Button and LED Indicators

### Main Power Button

Press and hold the main power button for 2 seconds until the LED indicator lights up or turns off.

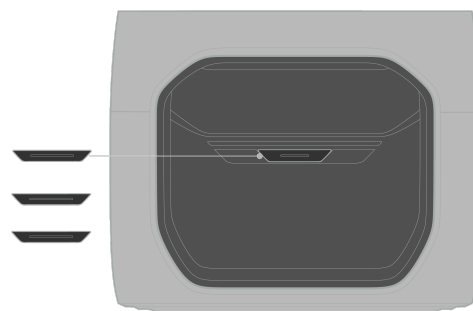



---

1	Off	The battery is powered off.
2	Breathing White	The battery is powered on and functioning normally.
3	Flashing White	The battery is performing a firmware update.

## Status LED

### Powering On/Off

- The status LED displays an outwards running pattern when the extra battery is powering on.
- The status LED displays an inwards running pattern when the extra battery is powering off.

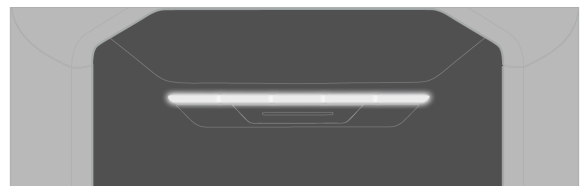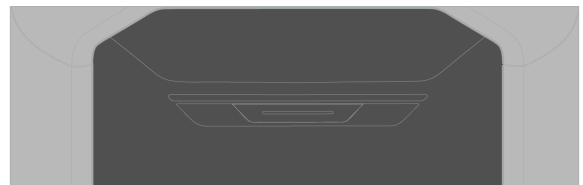

### Battery Level


When the status LED light is solid, the number of LEDs that are lit up indicates the current battery level.



---

## Charging


When part of the status LED is blinking, it indicates the battery is charging.

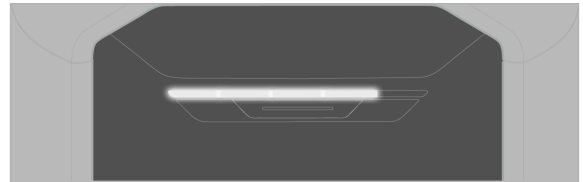

## Error

When the entire status LED is blinking, it indicates that an error has occurred.

- Check the EcoFlow in-app instructions of the connected power station for troubleshooting.

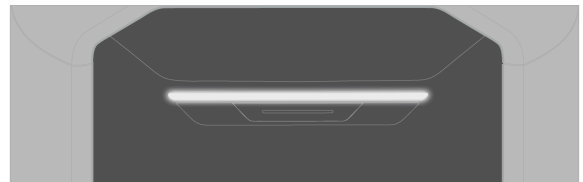

# Product Compatibility

## EcoFlow Power Station

Name	Model
EcoFlow DELTA 3	EF-DL-H10-3
EcoFlow DELTA 3 Plus	EF-DL-H10-4

---

EcoFlow DELTA 3 Ultra Plus	EF-DL-H02-3UP
----------------------------	---------------

EcoFlow DELTA 3 Max Plus	EF-DL3-MP
--------------------------	-----------

### Notice

- The product can be stacked with EcoFlow DELTA 3 series (EcoFlow DELTA 3 & DELTA 3 Plus) during use.
- It is not recommended to stack the battery with other series of power stations. If stacking is necessary, place the power station and battery with their long edges against the wall to prevent accidental falling.

### Other EcoFlow Products

Name	Model
EcoFlow WAVE 2 Portable Air Conditioner	EFKT210
EcoFlow PowerStream Microinverter	EFWN511, EFWN511B
EcoFlow 800W Alternator Charger	EF-FC-301-1
EcoFlow Smart Generator 3000 (Dual	EF-SG-H03-1 (charging only)

---

EcoFlow Smart  
Generator 4000 (Dual  
Fuel)


EF-SG-H01-1  
(charging only)

## Getting Started

### Support Your Power Station

The extra battery can expand the power station's battery capacity by storing more power. It also functions as a backup power source for loads when the power station's battery is low.


1. Connect the extra battery to the power station's Extra Battery Port (please use the provided extra battery charging cable).

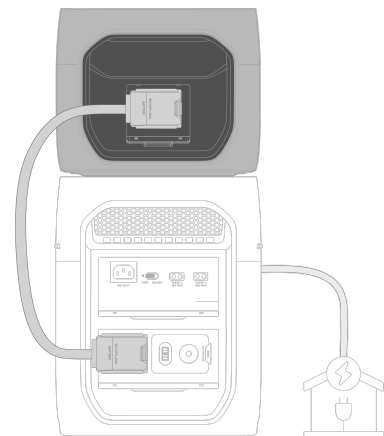

2. Once the battery is connected to the power station, turning on or off either one will activate or deactivate the other accordingly.

---

battery icon is displayed on the screen of the power station.

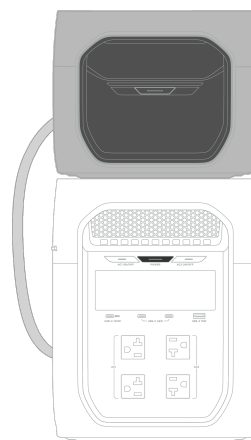


### **Notice**

Please do not plug or remove the charging cable while the power station is working.

## **Charge Your Extra Battery**


### **Via EcoFlow Power Station**

1. Connect the battery to the XT150 port of a compatible EcoFlow power station using the provided extra battery cable.
2. Then connect the power station to a power source.

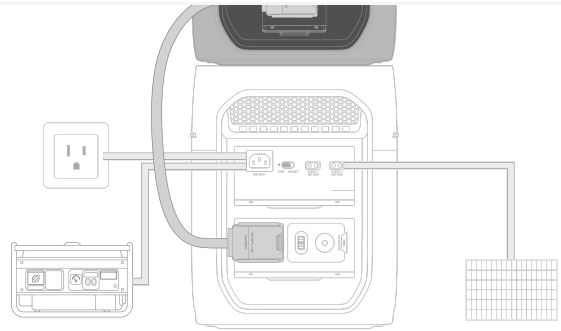

## Via EcoFlow Smart Generator

Connect the battery to the XT150 port of a compatible EcoFlow smart generator using the provided extra battery cable.

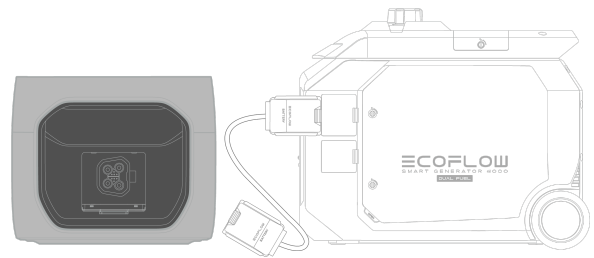

# Storage and Maintenance

## Storage

- Storage Temperature: 20°C-30°C (68°F-86°F)
- Do not store the product in places where the temperature exceeds 113°F (45°C) or falls below 14°F (-10°C).
- Store the product in a tidy, dry, and well-ventilated place.

- 
- For long-term storage of the product, follow these steps every 3 months to maintain battery health:
    1. Discharge the product to 0% battery level.
    2. Fully charge the product to 100% battery level.
    3. Discharge the product again to 60% battery level.

Note: the product will not be covered by the warranty if it is not charged or discharged for more than 6 months.

## **Cleaning**

- Use a soft, dry cloth to wipe and clean the product.

## **Maintain Battery Health**

- Avoid leaving the product unused for extended periods of time.
- Charge and discharge the product every 3 months to increase its lifespan.

# **Safety Instructions and Compliances**

## **Disclaimer**

Please read the product document and ensure that you understand it fully

---

reference. Improper use of this product may cause serious injury to yourself or others, or cause product damage and property loss. Once you use this product, it is deemed that you understand, approve and accept all the terms and content in this document. EcoFlow is not liable for any loss caused by the user's failure to use the product in compliance with the product document. In compliance with laws and regulations, EcoFlow reserves the right to the final interpretation of this document and all documents related to the product. This document is subject to changes (updates, revisions, or termination) without prior notice. Please visit EcoFlow's official website to obtain the latest product information: <https://www.ecoflow.com/>.

## **Safety Instructions**

1. Do not subject this product to severe impacts, vibrations, or drops.
2. Do not carry this product onto a plane.
3. Do not use the product near a heat source, such as a fire source or a heating furnace.
4. Do not get the product wet or immerse it in any liquid. When using the product in wet environments like rainy areas or places near water, protect it with a waterproof bag.
5. Follow the environment temperature requirements specified in the product specification to use or store

---

personal safety due to excessively high or low temperatures.

6. Do not use the product in an environment with strong static electricity or magnetic fields.
7. Keep the product out of reach of children and pets. If the product is to be used near children, they should be closely supervised.
8. Keep the product away from fumes, smoke, steam, and dust.
9. Store the product in a tidy, dry, and well-ventilated place.
10. Do not disassemble, repair, or modify this product by yourself. For any maintenance or service, please contact EcoFlow Customer Service.
11. Always disconnect the product from all external power sources before attempting any service or maintenance.
12. To reduce risk of damage to the electric plug and cord, pull the plug rather than the cord when disconnecting the product.
13. Do not pierce the product with sharp objects.
14. Do not put fingers or hands into the product.
15. Do not insert wires or other metal objects into the product to prevent short circuits.
16. Do not use any unofficial or unrecommended components or accessories. For any replacements, please contact EcoFlow for further assistance.



---

output cable.

18. Do not stack any heavy objects on the product.
19. Place the product on a stable and flat surface. Avoid damage to the device or personal injury due to the product falling or tipping over.
20. Use a soft, dry cloth to wipe and clean the product.
21. **Use in Repair Facility:** During use in a repair facility like a vehicle repair center, workshop, or any other place where repairs are conducted, do not place the product on the floor, or at a height less than 457 mm (18 inches) above the floor.

## In Case of Emergency

1. In case of emergency, take precautions against electric shock before touching the product, such as wearing insulating gloves.
2. If the product gets wet, stop using it immediately and refrain from further operation or powering it on. Place the product in a secure, waterproof, and well-ventilated area, then contact EcoFlow Customer Service for assistance.
3. If the product falls into water, place it in a secure, waterproof, and well-ventilated area, and keep it away from contact until it is completely dry. The dried product should not be used again and must be properly disposed of according to local laws and regulations.

---

extinguishers in the following order:  
water or water mist, sand, fire  
blanket, dry powder, and finally a  
carbon dioxide fire extinguisher.

## Recycling and Disposal

1. The product with severe damage, malfunction, or depleted battery life should be properly disposed of or recycled.
2. The product contains batteries.  
Please dispose of the product following local laws and regulations for battery disposal and recycling. Do not dispose of it with household waste to avoid environmental pollution and safety hazards.
3. If possible, ensure the battery is completely discharged (to 0% capacity) before disposing of the product. If not, refrain from placing the battery directly into a battery recycling box. Instead, contact a professional battery recycling company for proper handling.

## Regulatory Compliance

### FCC Compliance Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the

---

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

#### **INDUSTRY CANADA COMPLIANCE**

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class A digital apparatus complies

---

**CE**

Hereby, EcoFlow Inc.  
declares that this product is  
in compliance with  
Directives 2014/30/EU,  
2011/65/EU(RoHS), (EU)  
2015/863(RoHS). The full  
text of the EU Declaration of  
Conformity is available at  
the following Internet  
address:

<http://www.ecoflow.com/eu/eu-compliance>

**WEEE**

This marking indicates that  
this product should not be  
disposed of with other  
household waste within the  
EU. Recycle this product  
properly to prevent possible  
damage to the environment  
or a risk to human health  
via uncontrolled waste  
disposal and in order to  
promote the sustainable  
reuse of material resources.  
Please return your used  
product to an appropriate  
collection point or contact  
the retailer where you  
purchased this product.  
Your retailer will accept  
used products and return  
them to an environmentally-  
sound recycling facility.

declares that the equipment type battery is in compliance with Regulation (EU) 2023/1542 of the European Parliament.

# Appendix

## Technical Specifications

### General

Model	EFD3MP-EB
Net. Weight	Approx. 16 kg (35.3 lb)
Dimensions (W×D×H)	Approx. 494 × 239 × 196 mm (19.4 × 9.4× 7.7in.)

### Output

Extra Battery Port	43.2V-57.6V==100A Max
--------------------	-----------------------

### Input

Extra Battery Port	43.2V-57.6V==48A Max
--------------------	----------------------

### Battery Info


Rated Capacity	2048Wh (51.2V==40Ah)
Cell Chemistry	LFP (LiFePO <sub>4</sub> )

Protection Type	Over Voltage Protection, Overload Protection, Over
	Temperature Protection, Short Circuit Protection, Low Temperature Protection, Low Voltage Protection, Overcurrent Protection

**Environment**  
**Temperature**

Optimal Operating Temperature	20°C-30°C (68°F-86°F)
Charge Temperature	0°C-45°C (32°F-113°F)
Discharge Temperature	-10°C to 45°C (14°F-113°F)
Storage Temperature	-10°C to 45°C (14°F-113°F)

**What's in the Box**

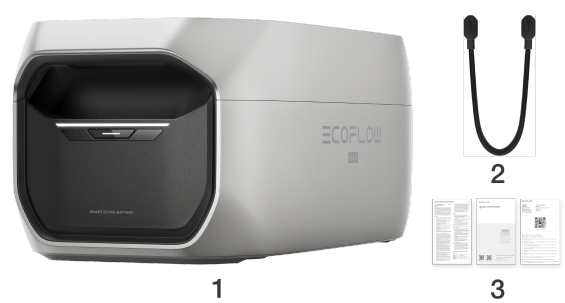

- 1. EcoFlow DELTA 3 Max Plus smart extra battery ×1
- 2. EcoFlow DELTA 3 Max Plus smart extra battery cable ×1

---

contact EcoFlow Customer Service  
for assistance.