

Dimensions shown are IEC standards

Key Features

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Wide operating temperature range (- 20°C / + 50°C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
 - Safety: IEC 62133-1 & ANSI C18.2M: Part 2
 - RoHS and REACH compliance
 - Quality: ISO 9001, Duracell World Class Continuous Program

Electrical characteristics

- Rated Capacity (ANSI C18.2M, Part 1) 750 mAh
- Nominal voltage (at + 20 °C) 1.2 V
- Operating Voltage 1.0V – 1.35V
- Typical Impedance @ 1kHz 35 mOhm

Physical characteristics

- Typical weight 11.5 g (0.406 oz.)
- Typical Volume 3.5 cm³ (0.21 in³)

Operating conditions

- Operating temperature range -20°C to 50°C (-4°F to 122°F)




Storage

Recommended storage area should be clean, with temperature not exceeding 5°C to 30°C limits, dry and well ventilated.

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

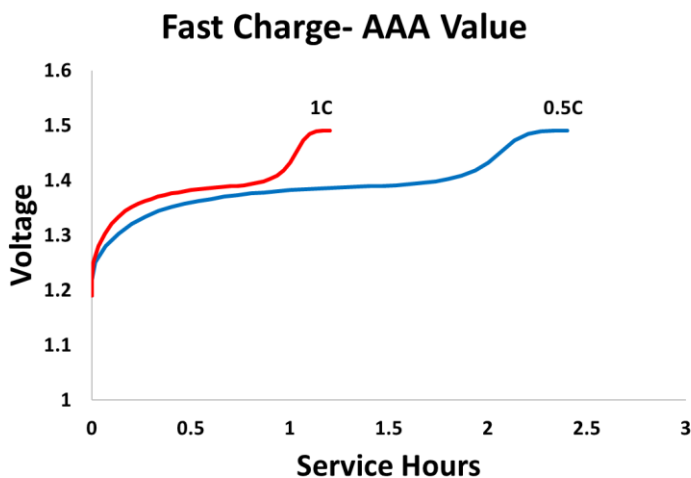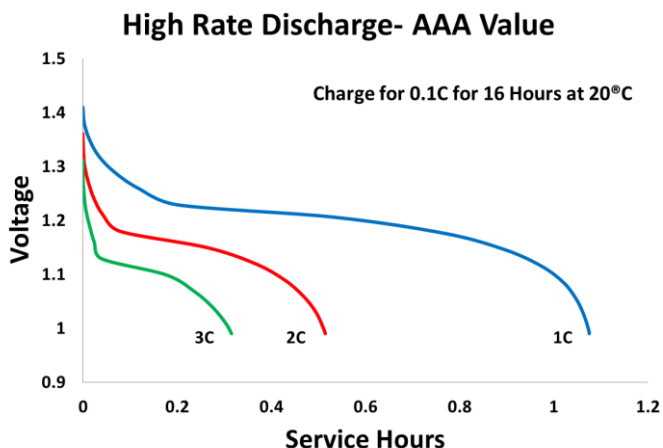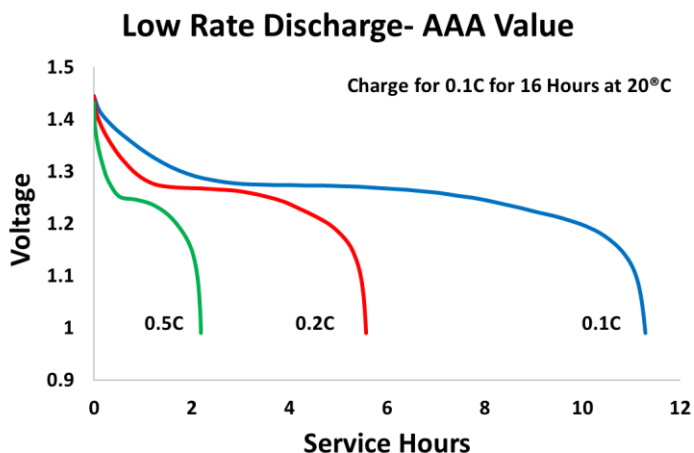

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.