

Product Introduction


It's a kind of high-performance intelligent multiple frequency scanning display, which adapts active matrix thin film transistor LED-backlit LCD. L'affichage est contrôlé par la technologie numérique du microprocesseur MCU. It is compact and lightweight, which is suitable for narrow working spaces.

Before installation, please check which of the following articles are complete in the packing box

- LCD x 1 -Power Adapter x 1 -Screwdriver x 1
- Base x 1 -Carte d'envoi x 1 -Guide de l'utilisateur x 1
- Signal Cable x 1

If any of the above product is missing, please contact with product distributor immediately.
Avis spécifique des accessoires ordonnés à l'avance. Veuillez contacter votre fournisseur pour plus d'informations.

Keys And Interfaces

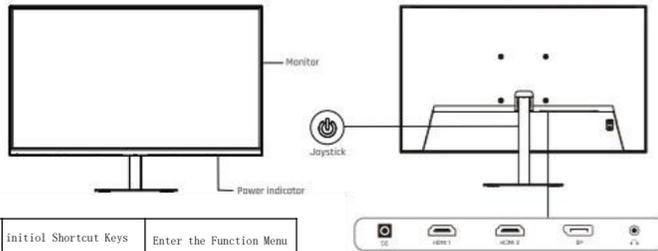



	Initial Shortcut Keys	Enter the Function Menu
	Entrée source Signal	Move Up
Mid	Luminance	Move Down
	Shutdown Key for Coming Assistance	Exit and Return to previous menu
	Shortcut Keys	Open Sub-menu and Selection Option
	Timed display dimming	Turn off the display by pressing and holding for 3 seconds

Signal Cable Connection
Connecter le câble de signal au port HDMI ou DVI de sortie de signal du PC. Puis connecter l'autre extrémité du câble de signal au port de signal correspondant sur le LCD.


Headset Connection
After connecting the headset, there will be audio output, and it also supports external speakers.

Power Indicator
L'indicateur constant signifie que l'affichage est une opération normale et que l'indicateur clignote représente un état sans signal. Sous l'état de conservation de l'énergie, l'affichage fonctionnera normalement si le signal est fourni. L'affichage est toujours alimenté. Ainsi, déplacez le cordon d'alimentation quand vous ne l'utilisez pas.

About base

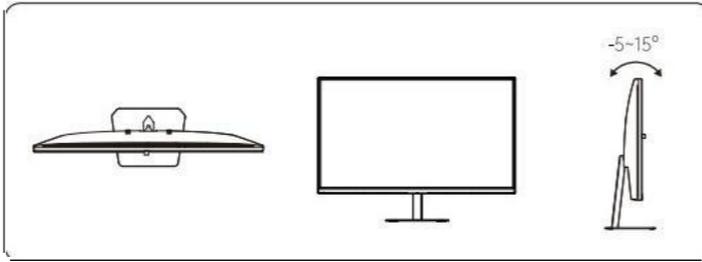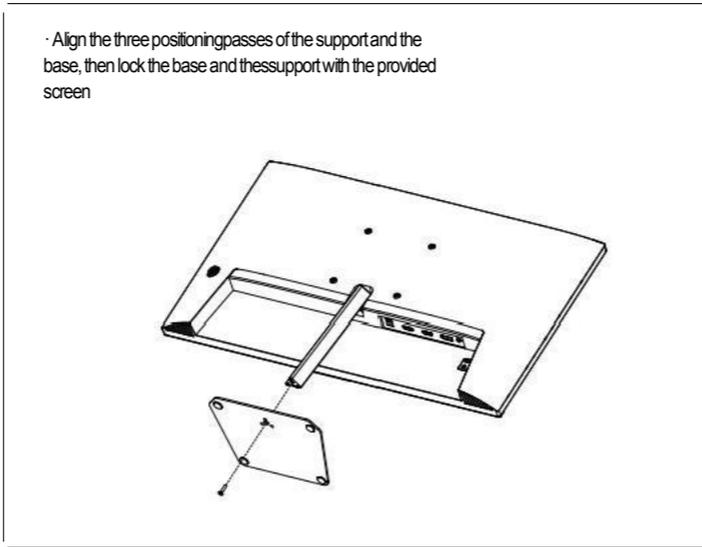

Mounting Location

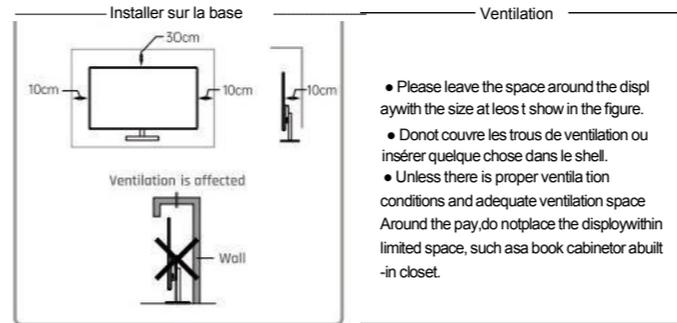

Installation Guide
- L'affichage doit être installé près d'une prise secteur AC qui peut être facilement branchée.
- Il est recommandé d'utiliser un support de montage mural approprié pour des raisons de sécurité.
- Pour prévenir les blessures, l'affichage doit être placé sur une surface horizontale plane, ou fixé sur un mur.
- Si vous devez l'installer sur un mur, cela doit être fait par des techniciens professionnels. Une mauvaise installation de l'affichage peut causer des instabilités.
- Ne placez pas l'affichage où il pourrait être affecté par des vibrations mécaniques.
- Ne placez pas l'affichage où les insectes pourraient entrer.
- Ne placez pas l'affichage directement devant un climatiseur, car le panneau interne pourrait se condenser, ce qui entraînerait des pannes.
- Ne placez pas l'affichage dans une zone à fort champ électromagnétique, car il pourrait être affecté et endommagé par les ondes électromagnétiques.

Safety Protection

Quand le signal vidéo du PC dépasse la gamme de fréquence de l'affichage, le signal de synchronisation de ligne et de champ sera désynchronisé. Dans ces circonstances, vous devez régler la fréquence de sortie du PC à une gamme acceptable pour que l'affichage fonctionne correctement.

Power Management System

Mode	Power Consumption
Normal Operation	≤ 36W
Standby	≤ 0.5W

Remark: All technical specifications in the User Guide and on the external packaging are allowed to change without prior notice. If there is a subtle difference between the User Guide and the actual operation, the latter shall prevail.

Product Technical Specifications

Panel Dimension	23.8"	Working Environment Requirements Maximum altitude Atmospheric pressure Operating temperature and humidity Storage temperature and humidity	5000m ~ 106kpa 0°C~40°C 30%~90% condensing -20°C~55°C 20%~93% Non-condensing
Best Operating Resolution Ratio	1920 × 1080 @ 180Hz		
Input Voltage	DC12V/3A		
Contrast	1000:1 (TYP)		
Visible Area	527mm x 296mm		
Pitch size for wall mount	100mm x 100mm		

Simple Problems Disposal

Symptoms	Disposal Methods
1. Écran blanc/indicateurs de puissance ne fonctionnent pas	Vérifier où l'alimentation en puissance est en bon contact avec l'affichage et la prise de puissance; Et vérifier où l'affichage est tourné hors
Blurred too large or too small images	Go to the "Image Settings" category menu and select "Image Auto Adjust" to make the monitor adjust automatically to correct. (Only available for monitors with VGA)
3. Écran sombre	Enter the "Brightness & Contrast" menu to regulate the contrast and the brightness of the display
4. Display overheating	Leave at least 10cm of ventilated space around the display. Do not place articles on the display
5. Dark/light spots when powered on	C'est normal. Parce que la différence de température est dans l'environnement, le tube rétroéclairé émet une lumière inégale au début de l'allumage après que l'affichage est allumé. Toutefois, le tube de retour à la normale après 20 minutes, et les taches sombres/légères disparaissent. Il sera éliminé à ce moment-là.
6. Image distortion, flashing, flickering	Check your computer configuration, choose the correct resolution, and reset your refresh rate
7. Noisy Signal when powered off	During the power of the display, there may be some noise signals on the screen caused by the normal discharge



More Information

Please scan code QR ou visite FR.KTCPLAY.COM

Any question or comment. Please contact:

support@ktcplay.com

support.eu@ktcplay.com [Europe]

Indicative Description of the Regulations for the Administration of the Recovery and Disposal of Waste Electrical and Electronic Products

To care for and protect the earth better, please send it to a local manufacturer with nationally recognized qualification for recycling conforming to the national applicable laws and regulations on recycling of waste electrical and electronic products when you do not longer need this product or at the end of its service life.



Les termes HDMI et HDMI-High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

Product Warranty Card

Customer Name	
Tel	
Adresse	
Modèle	
Device Number	
Purchase Date	

Warranty Rules

1. I confirm you with a three-year free warranty from the date of purchase as agreed in the contract.

2. The following cases are not covered by the warranty:

* Failure or damage caused by artificial color or natural disasters.

Failure caused by user's mistake: by using the wrong method of operation and precautions.

3. The liability scope of the warranty is limited to the maintenance of the products without covering any other liability.

4. If you are not sure about the repair and warranty of the machine of the warranty period, please visit the website EN.KTCPLAY.COM for the warranty policy.



Notice: Please fill out the card and submit when you apply for a warranty.


1. Please read all the instructions carefully before using the product.
 2. When cleaning the display, please unplug the power cord. If you use liquid cleaning spray, please use LCD screen cleaner in case of a stubborn stain.
 3. Do not use accessories that are not recommended by the manufacturer, or there may be dangerous.
 4. When you unplug the power cord of the display or the power adapter, please hold the power cord with your hand and pull it directly. Do not pull the power cord by the plug.
 5. Do not place the display near water, such as bathtub, washbasin, kitchen sink, or washing machine. Do not place the display on wet ground, near a swimming pool. Do not use your fingers or hard objects to press the surface of the LCD screen.
 6. The grooves and the hole are designed at the back and the bottom of the display for ventilation and heat dissipation of the components to ensure reliable operation. So, do not place the display on the bed, sofa, carpet, or other similar surfaces to prevent the heat dissipation holes from blocking and do not place the display near or above the radiator or heater. In addition, do not place the display in an embedded device unless adequate ventilation is provided.
 7. Only the power supply type shown on the nameplate can be used for the display. Please feel free to consult the display dealer or the local power supply administration, if you have any doubts about your power supply type.
 8. For safety, the display or the power adapter should use a power cord with a three-pronged plug. The third prong cannot be properly inserted unless the correct socket is used. If your socket does not match the plug, please contact an electrician to replace the original socket, so the plug can be inserted properly to ensure safety.
 9. When you face a high voltage or other danger, do not try to repair the display yourself. You can have it repaired by a qualified person.
 10. Please unplug the power cord of the display or the power adapter from the socket, and contact qualified maintenance personnel for repairing the display, in the following cases:
 - A. The power cord or the plug is damaged or worn out.
 - B. The display has fallen or the back cover is damaged.
 - C. Any obvious abnormality indicates a necessary repair.
- Please place the display in a well-ventilated environment, which is away from strong light, high temperature, or humidity.
12. The room temperature for the display storage is -20°C ~ 55°C, or it may be permanently damaged.

LCD Monitor

KTC H24F8

Display User Guide

>

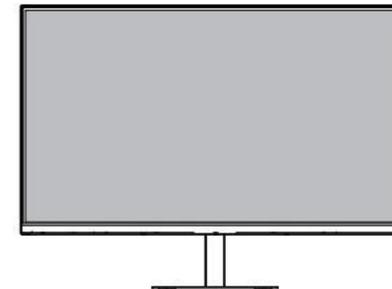

Please read the User Guide carefully and keep it properly. The pictures involved in the User Guide for reference only, please refer to the actual product for details.