


PLANE NO-DROP

Version  
Wall 90 cm - 800 m3/h

Collection  
Design

EAN code  
8034122362571

ENERGY LABEL

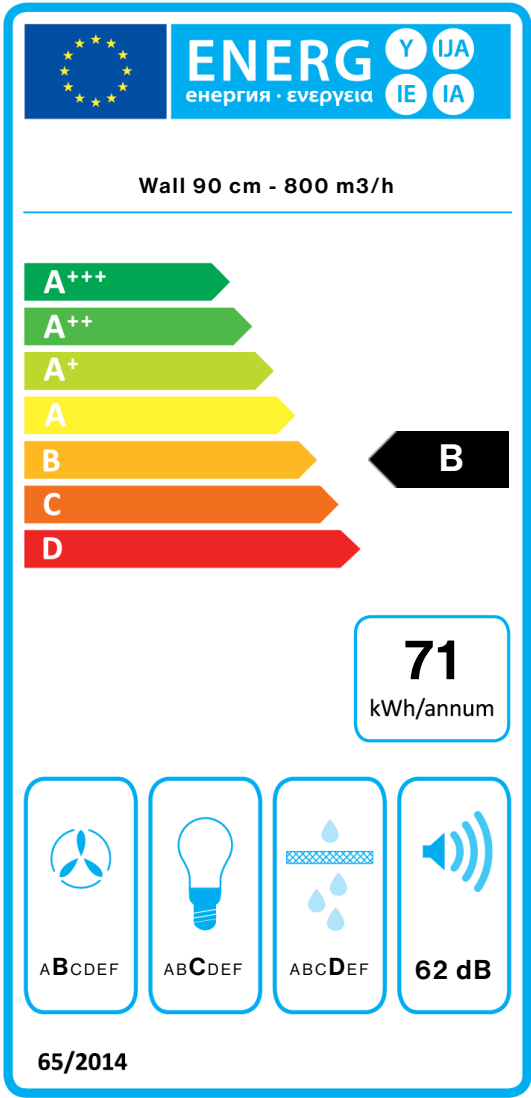

| PF         |                       |       |
|------------|-----------------------|-------|
| S          | Falmec Spa            |       |
| M          | Wall 90 cm - 800 m3/h |       |
| AEC        | 71,0                  | kWh/a |
| EEC        | B                     |       |
| FDE        | 26,3                  |       |
| FDEC       | B                     |       |
| LE         | 16,0                  |       |
| LEC        | C                     |       |
| GFE        | 70,0                  |       |
| GFEC       | D                     |       |
| Qmin       | 280,0                 | m³/h  |
| Qmax       | 480,0                 | m³/h  |
| Qboost     | 680,0                 | m³/h  |
| SPEmin     | 49                    | dBa   |
| SPEmax     | 62                    | dBa   |
| SPEboost   | 68                    | dBa   |
| PO         | -                     | W     |
| PS         | 0,48                  | W     |
| PI         |                       |       |
| F          | 1.1                   |       |
| EEL        | 66,2                  |       |
| Qbep       | 382,0                 | m³/h  |
| Pbep       | 384                   | Pa    |
| Qboost     | 680,0                 | m³/h  |
| Wbep       | 155,1                 | W     |
| WL         | 12,00                 | W     |
| Emiddle    | 192                   | lex   |
| Lwa-SPEmax | 62                    | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.