


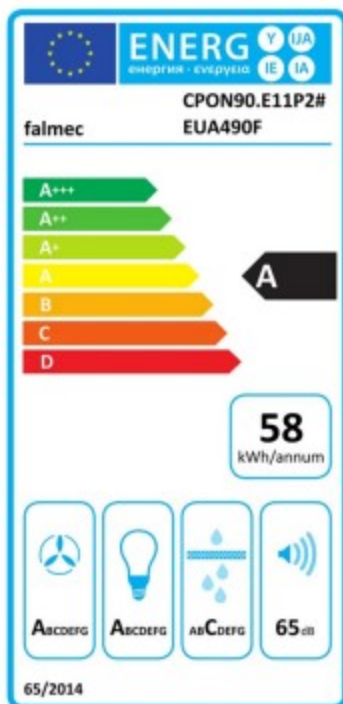

| PF         |                                        |                   |
|------------|----------------------------------------|-------------------|
| S          | Falmec Lab                             |                   |
| M          | Evo - Wall - 35 cm - Copper - 800 m3/h |                   |
| AEC        | 57.6                                   | kWh/a             |
| EEC        | A                                      |                   |
| FDE        | 31.6                                   |                   |
| FDEC       | A                                      |                   |
| LE         | 29.9                                   |                   |
| LEC        | A                                      |                   |
| GFE        | 76                                     |                   |
| GFEC       | C                                      |                   |
| Qmin       | 354                                    | m <sup>3</sup> /h |
| Qmax       | 655                                    | m <sup>3</sup> /h |
| Qboost     | 765                                    | m <sup>3</sup> /h |
| SPEmin     | 48                                     | dBa               |
| SPEmax     | 65                                     | dBa               |
| SPEboost   | 69                                     | dBa               |
| PO         |                                        |                   |
| PS         | 0                                      | W                 |
| PI         |                                        |                   |
| F          | 0                                      |                   |
| EEL        | 53                                     |                   |
| Qbep       | 449                                    | m <sup>3</sup> /h |
| Pbep       | 411                                    | Pa                |
| Qboost     | 765                                    | m <sup>3</sup> /h |
| Wbep       | 162                                    | W                 |
| WL         | 6                                      | W                 |
| Emiddle    | 179                                    | lux               |
| Lwa-SPEmax | 65                                     | dBa               |

PF\_Scheda prodotto conforme a 65/2014 S\_Vendor name / M\_Project identification / AEC\_Yearly energy consumption (AEC) hood / EEC\_Energy efficiency class / FDE\_Fluid dynamic efficiency (FDE) hood / FDEC\_Fluid dynamic efficiency class / LE\_Light efficiency (LE) hood / LEC\_Light efficiency class of luminous efficiency / GFE\_Fat filtration efficiency / GFEC\_Fat filtration efficiency class / Qmin\_Airflow (in m<sup>3</sup>/h) at minimum power under normal use conditions / Qmax\_Airflow (in m<sup>3</sup>/h) at maximum power under normal use conditions / Qboost\_Airflow (in m<sup>3</sup>/h) at the intensive power / SPEmin\_A-weighted sound power of airborne noise emissions at the minimum power under normal use conditions / SPEmax\_A-weighted sound power of airborne noise emissions at the maximum power under normal use conditions / SPEboost\_A-weighted sound power of airborne noise emissions under intensive or boost use conditions / PO\_CPower consumption in off mode (Po) / Pa\_CPower consumption in standby mode (Pa).

PI\_Additional information in accordance with 65/2014 4 F\_Factor of increase over time / EEL\_Energy Efficiency Index / Qbep\_Airflow speed measured at best efficiency point / Pbep\_Air pressure measured at best efficiency point / Qboost\_Full airflow / Wbep\_Energy input measured at best efficiency point / WL\_Nominal power of lighting system / Emiddle\_Average illumination of lighting system on cooking surface / Lwa-SPEmax\_Lowest pressure level at maximum power