

Getting Started - SIGNATURE K650




Connect your keyboard to your device

Choose how you want to pair your keyboard to your device. You have two options:

- [Use a direct Bluetooth® Low Energy connection*](#)
- [Use the Logi Bolt receiver](#)


*For Chrome OS users we recommend connecting to your device only through Bluetooth Low Energy. USB receiver connectivity has some limitations.


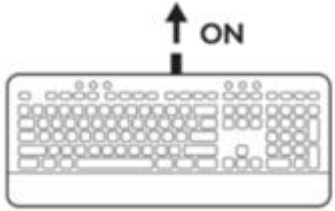
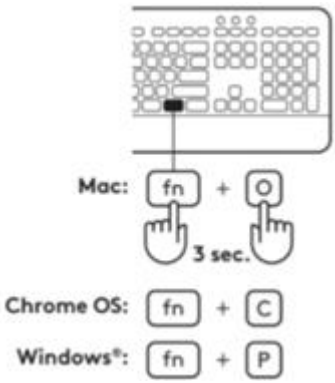
To pair through Bluetooth:

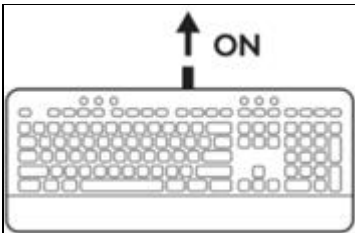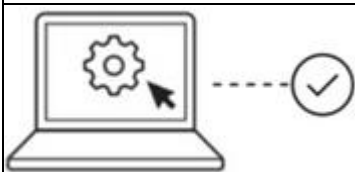	STEP 1 Remove the pull-tab from your keyboard. It will automatically turn on. A white LED on your keyboard (on the Connect key) will start blinking.
	STEP 2 Open the Bluetooth settings on your device. Add a new peripheral by selecting the K650 keyboard from your list of devices. Your keyboard and mouse are paired once the LEDs stop blinking.
	STEP 3 Your computer will require you to enter a random set of numbers. Type the numbers and then press the Enter key on your K650 keyboard. Your keyboard is now ready to use.

Click [here](#) for more details on how to do this on your computer. If you experience issues with Bluetooth, click [here](#) for Bluetooth troubleshooting.

To pair through Logi Bolt receiver:

	STEP 1 Take the Logi Bolt receiver from the packaging tray for your keyboard and mouse. IMPORTANT: Don't remove the pull-tabs from your keyboard and mouse yet.
---	---

	<p>STEP 2</p> <p>Insert the receiver into any available USB port on your desktop or laptop.</p>
	<p>STEP 3</p> <p>Remove the pull-tab from your keyboard. It will automatically turn on. When the white LED on the Connect key stops blinking, your device is successfully connected.</p>
	<p>STEP 4</p> <p>Set the right keyboard layout for your computer's operating system — long-press for 3 seconds using the following shortcuts to set up for Windows, Mac or CHROME:</p> <ul style="list-style-type: none"> • Windows: Fn + P • MacOS: Fn + O • Chrome OS: Fn + C <p>IMPORTANT: Windows is the default OS layout. If you are using a Windows computer you can skip this step. Your keyboard is now ready to use.</p>

Learn More About Your Product

Product Overview



1. Batteries + receiver compartment (keyboard bottom side)
2. Connect key + LED (white)
3. Battery Status LED (green/red)

4. On/Off switch

Receiver Compartment

If you are not using your Logi Bolt USB receiver, you can safely store it inside your keyboard:

To store it on your keyboard:

1. Remove the battery door from the bottom of your keyboard.



2. The receiver compartment is located to the right of the batteries.



















3. Place your Logi Bolt receiver in the compartment and slide the receiver to the right to secure it.








Keyboard Functions







You have a full range of useful productive tools on your keyboard that will help you save time and work faster. Most of these keys work without the need of installing software except for:

- **Mute Microphone key:** Install [Logitech Options+](#) to work on Windows and Mac. It works out of the box on Chrome OS
- **Close browser tab key, Settings key and Calculator key:** Install [Logitech Options+](#) to work on Mac. It works out of the box on Windows and Chrome OS

F-Row Keys	Main Function	Secondary Function
	Escape	Fn Lock
	Brightness down	F1
	Brightness down	F2
	Task View	F3
	App Switch	F4
	Dictation*	F5
	Emoji**	F6
	Snip & sketch	F7
	Mute Mic	F8
	Back in Browser	F9
	Refresh in Browser	F10
	Open tab in browser	F11
	Close tab in browser	F12
	Connect key	—
	Settings	—
	Print Panel	—

F-Row Keys	Main Function	Secondary Function
	Calculator	—
	Show Desktop	Scroll lock
	Search	Contextual Menu
	Screen Lock	—


Language Switch Key	Main Function	Secondary Function
	Input Language Switch	Insert

Hot Keys	Main Function	Secondary Function
	Previous Track	—
	Play Pause	—
	Next Track	—
	Mute Sound	—
	Volume Down	—
	Volume Up	—

Multi-OS keyboard

Your keyboard is designed to work with multiple operating systems (OS): Windows, macOS, Chrome OS.

FOR WIN AND MACOS KEYBOARD LAYOUT

If you are a macOS user, the special characters and keys will be on the left side of the keys:	If you are a Windows user, the special characters will be on the right side of the key:
	
*MacOS layout is compatible with iOS and iPadOS as well	*Windows layout is compatible with Linux and Android as well

FOR CHROME OS KEYBOARD LAYOUT*



If you are a Chrome user, you will find one dedicated Chrome function, Launcher key, on top of the Start key. Make sure you have selected the Chrome OS layout (FN+C) when you connect your keyboard.



*For Chrome OS users we recommend connecting to your device only through Bluetooth Low Energy.

Battery Status Notification

Your keyboard will let you know when it is running low on battery life.

	
From 100% to 6% the battery LED will be green.	From 5% and below, the battery LED will be red. You can continue using your device for one month when the battery is low.

Install Logitech Software


Download [Logitech Options+](#) to customize your keyboard and benefit from all of the useful shortcuts and other possibilities it has to offer. To download and learn more about the full range of features, click [here](#).

How to customize your keyboard with Logitech Options +

1. Download and install Logitech Options+. Click [here](#) to download the software.
2. An installer window will pop up on your screen. Click **Install Options+**.




3. Once Logitech Options+ is installed. A window will open and you will be able to see an image of your keyboard. Click on it.

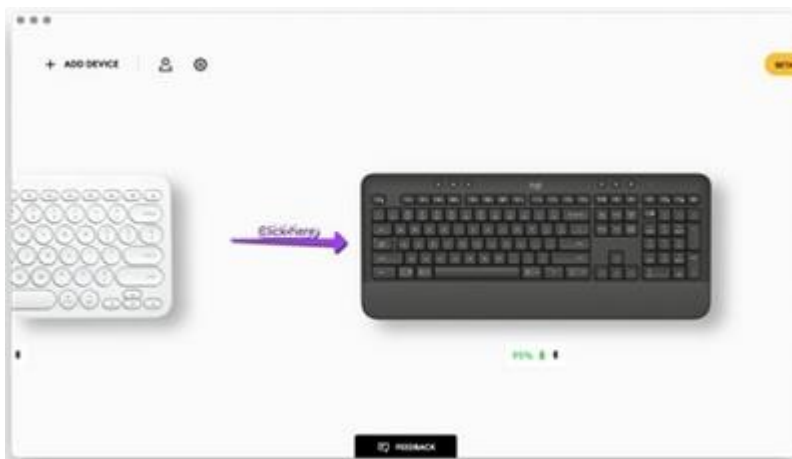

- You will be taken into a quick onboarding process that shows you how to customize your keyboard. We highly recommend **not** to skip it.




- Once you finish, you can start your customization:
KEYBOARD: Click on the **Keys** button on the left side of the screen.

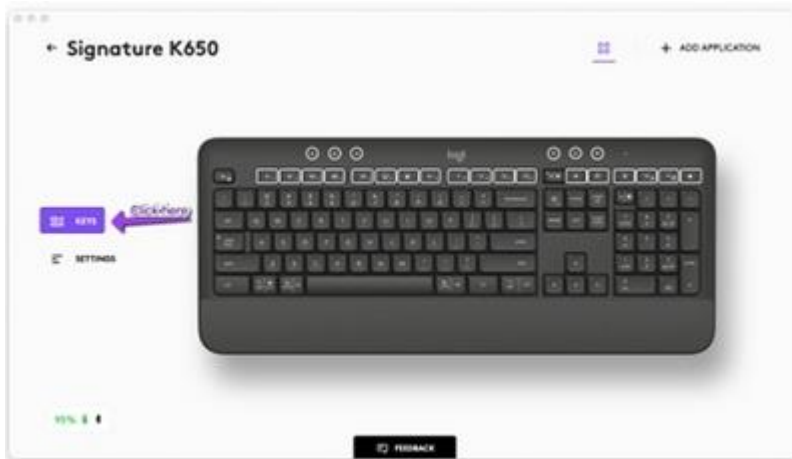

- For example, to customize your keyboard functions keys, click on any of the keys that you wish to customize.



- Simply click on the function you like to set on that button/key from the options that appear on the right side of the screen and you are done!

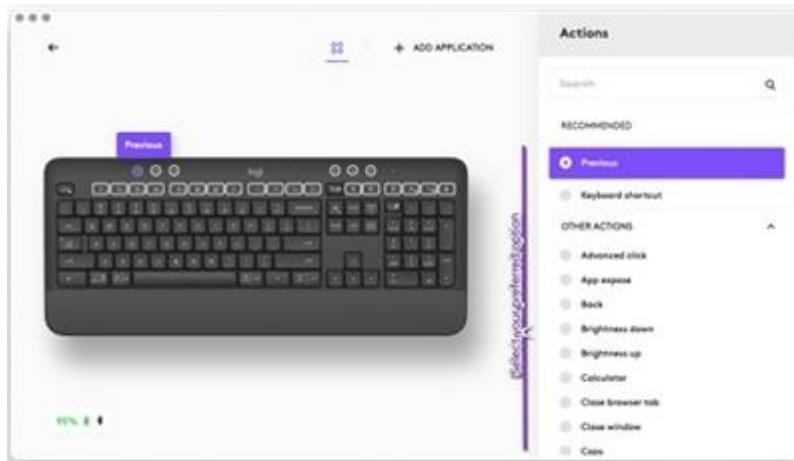

Software notifications

When you install [Logitech Options+](#) software you will also get on-screen notifications for some actions you do on your keyboard.

- Low battery**


When your keyboard or mouse reaches 5% of battery left you get a battery notification on the screen.



- F-Keys switch**

Press Fn + Esc to swap between Media keys and F-Keys. We've added a notification to let you know you've swapped.

NOTE: By default, the keyboard has direct access to Media Keys.

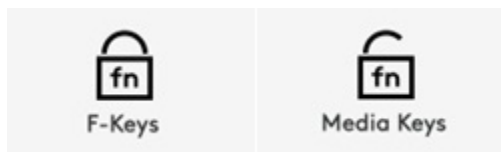

- Caps Lock Notification**

Besides the LED on your Caps Lock key lighting up, you will have an on screen notification to show you when you have Caps Lock function activated.

